

SILENCED version

- 1 cylinder
- 441 cm³
- 7,3 kW/10,0 HP
- 3600 r.p.m.
- Nm 22,5@2100



Construction

- 4 -stroke air cooled diesel engine
- Conical power take-off on crankshaft
- Anticlockwise rotation
- Direct injection
- Forced lubrication with oil pump
- Centrifugal mass governor
- Built-in full flow oil filter
- Oil breathing blow-by with safety device
- Automatic extra fuel starting device
- Self bleeding fuel system
- Torque regulator
- Automatic compression release
- Die-cast aluminium crankcase with integral cast iron cylinder liner
- Aluminium alloy cylinder head
- Built-in rigid feet
- Hydraulic tappets



Applications

- Two-wheel tractor
- Agricultural mower
- Agricultural pump
- High pressure cleaner
- Generating set
- Vibrating plate

SERIE 15LD S

Specifications

Cylinders	N.	1
Displacement	cm ³	441
Bore	mm	86
Stroke	mm	76
Compression ratio		20,5:1
Rating kW/HP	N (80/1269/CEE) ISO 1585	7,3/10,0
	NB ISO 3046 IFN	6,8/9,2
	NA ISO 3046 ICXN	6,2/8,4
Max. torque	Nm	22,5@2100
Min. idling speed		1100
Fuel tank capacity	l	5
Oil consumption	kg/h.	0,0040
Oil sump capacity	l	1,5
Min. allowable oil pressure	bar	1
Max. allowable inclination for:		
- short periods of operation (max. time 30 minutes)		25°
- peak values (max. time 1 minute)		35°
Cap. of air required for correct combustion @ 3600 r.p.m.	l/min.	640
Cap. of air required for correct cooling @ 3600 r.p.m.	l/min.	5500
Dry weight	kg	45
Recommended battery	V/Ah	12/44
Minimum pulley diameters for belt drive		

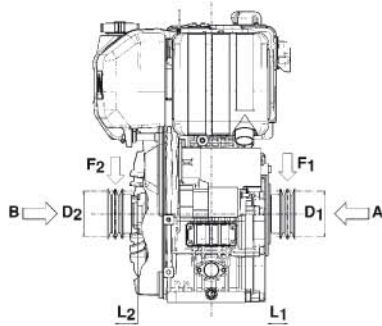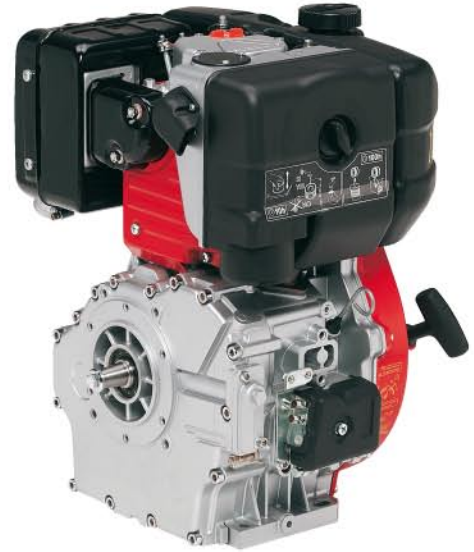

$$D_2 \text{ (mm)} \geq 620 [66+L_2 \text{ (mm)}] \quad \begin{matrix} N \text{ (kW)} \\ n \text{ (RPM)} \end{matrix}$$

$$D_1 \text{ (mm)} \geq 650 [53+L_1 \text{ (mm)}] \quad \begin{matrix} N \text{ (kW)} \\ n \text{ (RPM)} \end{matrix}$$

Max. intermittent axial load in both directions A-B = 200 kg


$$F_2 \text{ (N)} \leq \frac{92000}{66+L_2 \text{ (mm)}}$$

$$F_1 \text{ (N)} \leq \frac{89000}{53+L_1 \text{ (mm)}}$$

Maximum radial force on pulley for belt drive

Sound pressure level dB (A)


Sound level polar diagram open field - 4 meters microphone
3000 rpm running engine on generating set without canopy

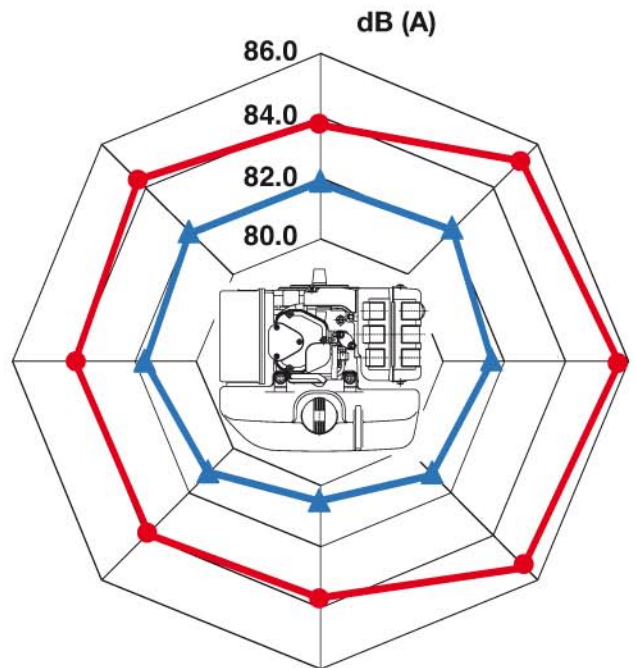

▲ 15LD440s without load ● 15LD440s with 5 kW load

SERIE 15LD S

Curves 15LD 440S

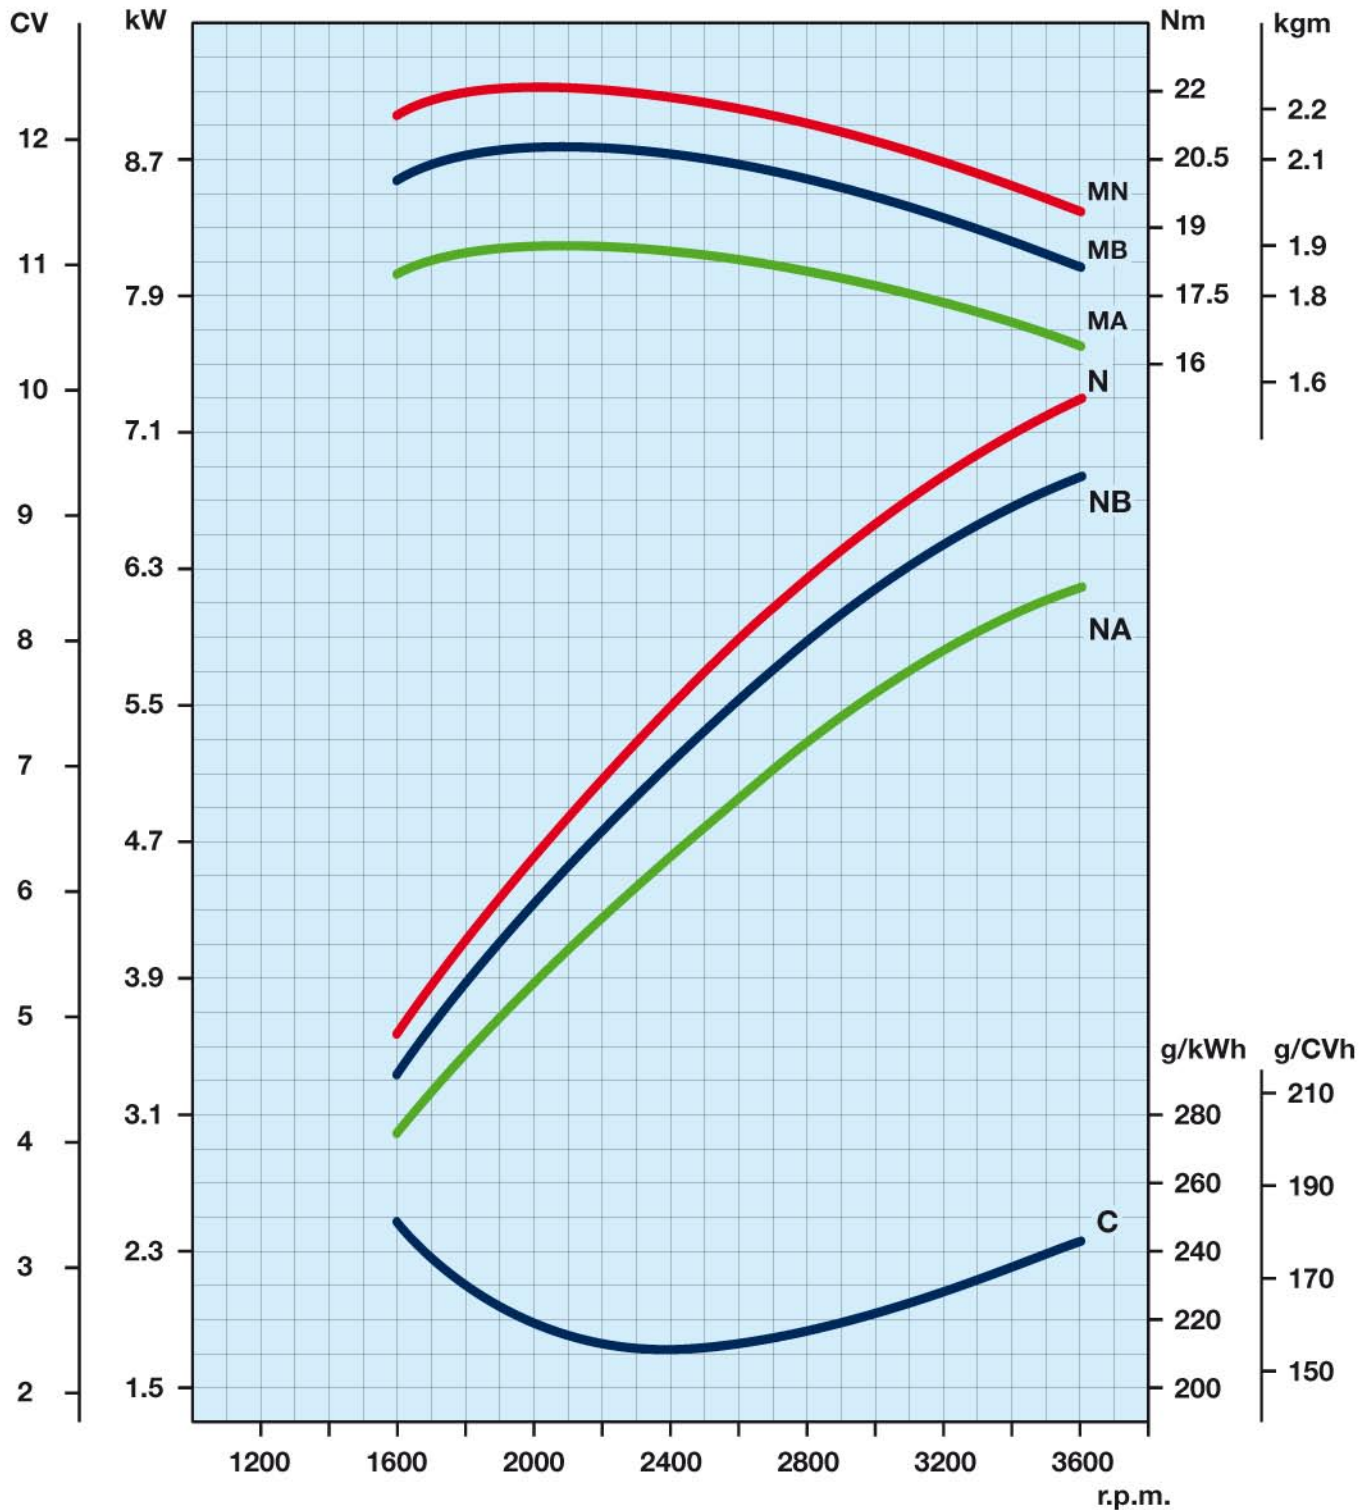

N Power curve - 80/1269/CEE - ISO 1585 -

NB Power curve - ISO 3046 - IFN -

NA Power curve - ISO 3046 - ICXN -


MN Torque curve - (N curve)

MB (NB curve) - **MA** (NA curve)

C Specific fuel consumption - (NB curve)

Power ratings refer to engines equipped with air filter, standard muffler, after being run in and in ambient conditions of 20°C and 1 bar. Power levels drop by 1% every 100m altitude and by 2% every 5°C above 20°C.

Technical drawings *

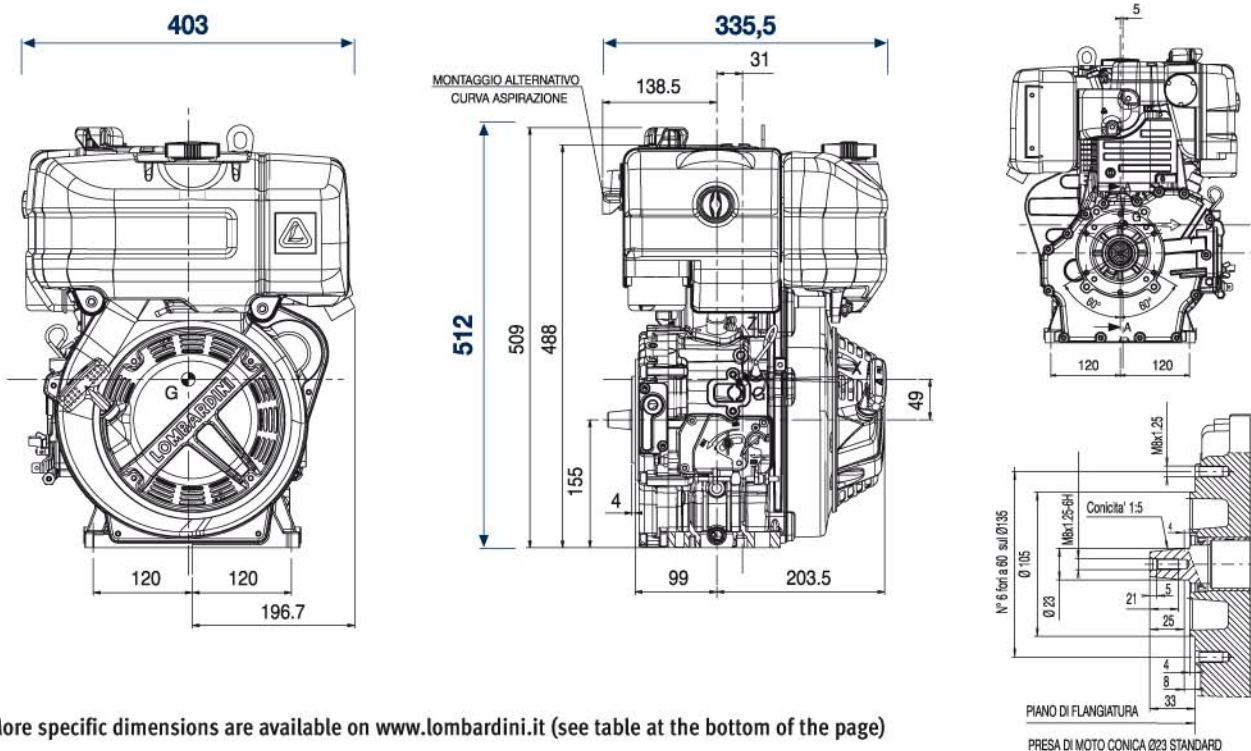

* More specific dimensions are available on www.lombardini.it (see table at the bottom of the page)

Standard equipment

- Recoil starting and automatic compression release
- Fuel tank
- Fuel filter
- Dry-air cleaner
- Muffler with guard
- Accelerator and stop manual control
- User maintenance-spare parts booklet

Accessories

- Power take-off flywheel side (engines with electrical starting)
- Power take-offs with flanging and special shaft
- Internal dynamic balancer
- Oil-bath air-cleaner
- Electric start 12 V / 24 V
- Keyswitch panel
- Emergency stop through electrovalve
- Accelerator and stop remote control
- Single lever control
- Control lever guard
- Fuel lift pump
- Oil dipstick on cylinder head
- Oil pressure switch
- Oil temperature switch
- Glow plug on intake manifold
- Recoil with denoising cover
- Grass protection for engine cooling



ISO 9001 Cert. n. 0446 - 1405
QS. 9000 Cert. n. 2231/0

LOMBARDINI
A KOHLER COMPANY

Via Cav. del Lavoro Adelmo Lombardini, 2
42100 Reggio Emilia - Italia
Tel. ++39 0522.3891 - Fax ++39 0522.389503
www.lombardini.it

Files for this product available on www.lombardini.it

Data sheet	15LD440sDS.PDF
Owner manual	15LD440sOM.PDF
Service manual	15LD440sSM.PDF
Technical drawing	15LD440sTD.DWG
Power curve	15LD440sPC.PDF

LOMBARDINI RESERVES THE RIGHT TO MAKE MODIFICATIONS WITHOUT PRIOR NOTICE.

cod. 3558314 - 07-2008